

## Vertical Contact Toaster | VCTM-2



# PERFECTLY TOASTED BUNS

**The Vertical Contact Toaster (VCTM-2) is used in the largest and most successful foodservice operations around the world, giving buns a consistent, golden-brown finish that helps burgers taste better, look better, and feel hotter when in the hands of the customers.**

With its small footprint, the VCTM-2 is a perfect fit for any operation where high-quality bun toasting is the objective. The VCTM-2 also features a variable speed motor that provides operations with flexibility for future menu items and allows for light/dark adjustments. It toasts two buns simultaneously and features an individual heel and crown compression knobs that allow operations to easily adjust toast quality. With a smaller footprint than the standard Vertical Contact Toaster, the VCTM-2 is a perfect fit for any operation where space is limited.



VCTM-2 Vertical Contact Toaster



### On-demand Results

Forget batch toasting. Toast buns as needed and serve sandwiches fresh without causing any delays.



### Adjustable Quality


Compression settings and platen temperatures are easily adjustable. Every bun can have a golden-brown finish without being flattened or marked.



### Small Footprint

The upright design saves valuable counterspace, allowing it to easily integrate into any operation.

# Vertical Contact Toaster | VCTM-2

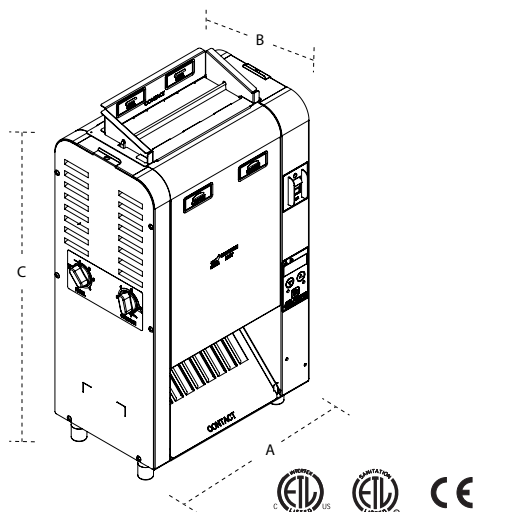

## Features:

- Toasts two complete buns simultaneously for increased capacity.
- Variable speed motor provides operations with flexibility for future menu items and allows for light/ dark adjustments.
- Compact footprint is approximately 30% smaller than the VCT-2000.
- Available with mechanical butter wheel to give buns a flavorful toast.
- Available with an auxiliary heater that warms all sides of buns.
- Individual heel and crown compression.
- Digital controller to adjust temperature.

### VCTM-2 (with belt wraps)

### Electrical Ratings

### Dimensions and Weight

| Model & Mfg. No. | Capacity             | Approvals | Auxiliary Heater | Plug    | Volts   | Watts | Amps     | Hz.   | Width        | Depth            | Height           | Shipping Weight   |
|------------------|----------------------|-----------|------------------|---------|---------|-------|----------|-------|--------------|------------------|------------------|-------------------|
| VCTM-2 9210983   | Variable Speed Motor |           | No               | BS-1363 | 208-230 | 2100  | 10.1-9.1 | 50/60 | 14" (356 mm) | 10 1/2" (268 mm) | 25 1/2" (648 mm) | 67 lbs. (30.4 kg) |

### VCTM-2 (without belt wraps)

|                |                      |  |    |            |         |      |          |       |              |                  |                  |                   |
|----------------|----------------------|--|----|------------|---------|------|----------|-------|--------------|------------------|------------------|-------------------|
| VCTM-2 9210959 | Variable Speed Motor |  | No | IEC-309    | 208-230 | 2100 | 10.1-9.1 | 50/60 | 14" (356 mm) | 10 1/2" (268 mm) | 25 1/2" (648 mm) | 67 lbs. (30.4 kg) |
| VCTM-2 9210960 | Variable Speed Motor |  | No | NEMA 6-20P | 208-230 | 2100 | 10.1-9.1 | 50/60 | 14" (356 mm) | 10 1/2" (268 mm) | 25 1/2" (648 mm) | 67 lbs. (30.4 kg) |

### VCTM-2 with Auxiliary Heater

|                |                      |  |     |            |         |      |           |       |              |                  |                  |                   |
|----------------|----------------------|--|-----|------------|---------|------|-----------|-------|--------------|------------------|------------------|-------------------|
| VCTM-2 9210916 | Variable Speed Motor |  | Yes | IEC-309    | 208-230 | 3100 | 14.9-13.5 | 50/60 | 14" (356 mm) | 10 1/2" (268 mm) | 25 1/2" (648 mm) | 67 lbs. (30.4 kg) |
| VCTM-2 9210929 | Variable Speed Motor |  | Yes | NEMA 6-20P | 208-230 | 3100 | 14.9-13.5 | 50/60 | 14" (356 mm) | 10 1/2" (268 mm) | 25 1/2" (648 mm) | 67 lbs. (30.4 kg) |

### VCTM-2 with Auxiliary Heater and Butter Wheel

|                |                      |  |     |            |         |      |           |       |                  |                  |                  |                   |
|----------------|----------------------|--|-----|------------|---------|------|-----------|-------|------------------|------------------|------------------|-------------------|
| VCTM-2 9210913 | Variable Speed Motor |  | Yes | NEMA 6-20P | 208-230 | 3100 | 14.9-13.5 | 50/60 | 15 1/4" (387 mm) | 14 3/4" (375 mm) | 25 1/2" (648 mm) | 70 lbs. (31.8 kg) |
| VCTM-2 9210914 | Variable Speed Motor |  | Yes | IEC-309    | 208-230 | 3100 | 14.9-13.5 | 50/60 | 15 1/4" (387 mm) | 14 3/4" (375 mm) | 25 1/2" (648 mm) | 70 lbs. (31.8 kg) |

Dimensions are for item without shipping box. Shipping weight includes item and shipping box. Items highlighted in blue are for international markets.

## Size Comparison

