



For more than 25 years, the Vertical Contact Toaster has been a staple in foodservice operations, building a reputation for quality and reliability around the world.

The Vertical Contact Toaster gives buns a consistent, golden brown finish which helps the sandwich stay firm and delicious. The VCT-50 has a preset toast time of 50 seconds.



VCT-50 Vertical Contact Toaster



Dual-Sided Platen

Vertical Contact Toaster has more capacity than conventional single-sided toasters, allowing operators to quickly serve fresh products



Dial Temperature Thermostat

Easily adjust the quality of the toast for a variety of different bread products




Small Footprint

The upright design saves valuable counter space, allowing it to easily integrate into any operation



Vertical Contact Toaster | VCT-50

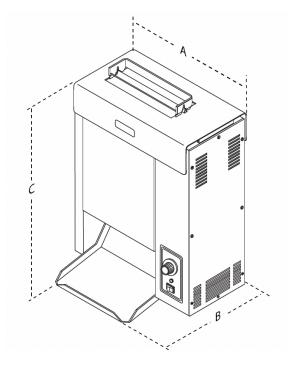

Features:


- Continuously moving conveyor allows for immediate toasting
- · Separate compression adjustments for heel and crown
- Release sheets allow buns to move easily down the heated platen without sticking or slipping
- · Easy to operate and clean
- · Stainless steel construction

VCT-50			Electrical Ratings					Dimensions			
Model & Mfg. No.	Capacity*	Approvals	Plug	Volts	Watts	Amps	Hz.	Width (A)	Depth (B)	Height (C)	Shipping Weight
VCT-50 9200600	50-sec. toast time	0.	NEMA 5-15P	120	1760	14.7	50/60	21 1/4″ (540 mm)	15 1/4″ (387 mm)	23 1/4" (591 mm)	84 lbs. (38.1 kg)
VCT-50 9200606	50-sec. toast time	.	NEMA 6-20P	208-240	3460	12.5- 14.4	50/60	21 1/4" (540 mm)	15 1/4″ (387 mm)	23 1/4" (591 mm)	84 lbs. (38.1 kg)
VCT-50 92006202	50-sec. toast time	.	NEMA 6-20P	208-240	3460	12.5- 14.4	50/60	21 1/4" (540 mm)	15 1/4" (387 mm)	23 1/4" (591 mm)	84 lbs. (38.1 kg)
VCT-50 9200608	50-sec. toast time	۵ (9	CEE 7/7	208-240	2600- 3460	12.5- 14.4	50/60	22 1/4″ (565 mm)	15 1/4″ (387 mm)	23 1/4″ (591 mm)	84 lbs. (38.1 kg)
VCT-50 9200609	50-sec. toast time	۵ (9	IEC-309	208-240	2600- 3460	12.5- 14.4	50/60	22 1/4″ (565 mm)	15 1/4″ (387 mm)	23 1/4″ (591 mm)	84 lbs. (38.1 kg)

Dimensions are for item without shipping box. Shipping weight includes item and shipping box. Items highlighted in blue are for international markets.

*Toast time will vary 20% depending on power frequency

Bun Specifications





Antunes delivers a complete range of countertop cooking equipment, water treatment, digital, and automation solutions to foodservice operations around the world. Learn more at antunes.com.

CORPORATE HEADQUARTERS Carol Stream, Illinois, USA Phone: +1.630.784.1000 Toll Free: +1.800.253.2991

CHINA FACILITY Suzhou, China Phone: +84.512.6841.3637 Fax: +86.512.6841.3907 INDIA FACILITY

57-58 Thattankulam Rd., Lotus Colony, J Garden Madhavaram, Chennai, India 600060