



# PERFECTLY TOASTED BUNS

**The Radiant Toaster with dual horizontal lanes, RT-2H, brings efficiency and versatility to your toasting process.**

The Radiant Toaster with Dual Lanes, RT-2H features two toasting lanes for a high toasting capacity while maximizing valuable counterspace. Designed for quality and consistency,

Each toasting lane is independently controlled for maximum flexibility while toasting different products at once. The RT-2H front load and front return allows operators to work quickly and efficiently without wasting time reaching for product. With an integrated holding zone, operators can keep up with demand during peak hours.



RT-2H Radiant Toaster with Dual Horizontal Lanes



#### Maximize Throughput

Dual horizontal lanes with independent controls deliver high-volume performance in a compact design



#### Toast It All

Versatile performance for buns, croissants, muffins, & more



#### Built for Demanding Kitchens


Durable and consistent toasting performance



#### Best Results

Smart controller automatically senses each product and adjusts toast time to deliver perfect, consistent results every time.

## Radiant Toaster with Dual Horizontal Lanes | RT-2H

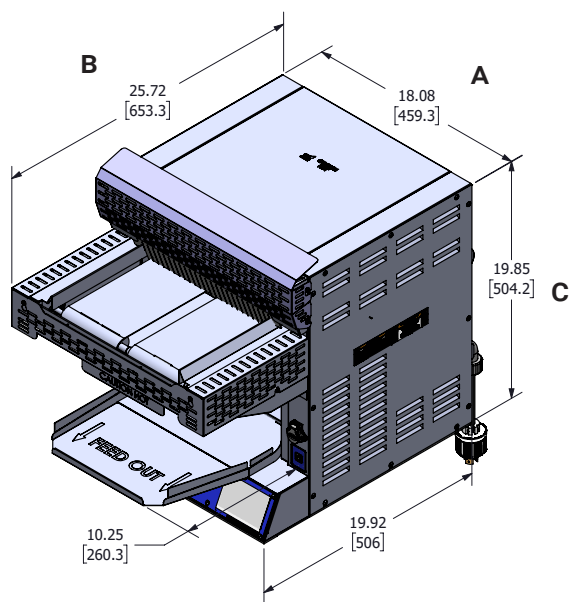

### Features:

- Dual toasting lanes with independent controls for toasting a variety of products
- Independent, adjustable heat control
- Easy-to-use touchscreen interface
- Programmable Day/Part set points
- Removable crumb tray for easy cleaning
- Front load and front return

### Accessories

Temperature Control: Solid State with Display

Power Cord: 6 ft. grounded power cord supplied

| RT-2H            |             | Electrical Ratings |       |      |       | Dimensions and Weight  |                      |                   |        |
|------------------|-------------|--------------------|-------|------|-------|------------------------|----------------------|-------------------|--------|
| Model & Mfg. No. | Plug        | Volts              | Watts | Amps | Hz.   | Width (A)              | Depth (B)            | Height (C)        | Weight |
| RT-2H            | NEMA L6-30P | 208                | 5000  | 24   | 50/60 | 18.1/4"<br>(463.55 mm) | 25.72"<br>(653.3 mm) | 19"<br>(504.2 mm) | 86 lbs |